



Proximity & PIN
Time & Attendance Access Controller

505R



505R



KEY Features


- 125 KHz Standalone Proximity / PIN Access Controller
- Dual Function for Access Control and Time & Attendance
- Dynamic Control of Memory up to 10,000 Users / up to 7,250 Event Buffers
- Standalone / Network Communication via RS232 / RS422 / RS485 (Max.32ch), TCP/IP (External LAN Converter required)
- 1 External Reader Port for Anti-passback : 26bit Wiegand, 4 / 8bit Burst for PIN
- Duress Mode Function
- Independent 4 Inputs and 4 Outputs including 2ea of 2 Form-C Relay Outputs
- Dual Tamper Switches
- Alarm Event Monitoring using Tamper Switch (by Application Software)
- Compatible Software: STARWATCH DUAL PRO I / II

Star

Time Schedules

- Time Code : 10
- Time Interval : 5
- Holiday Code : 10
- Holiday : 32

Standalone Configuration

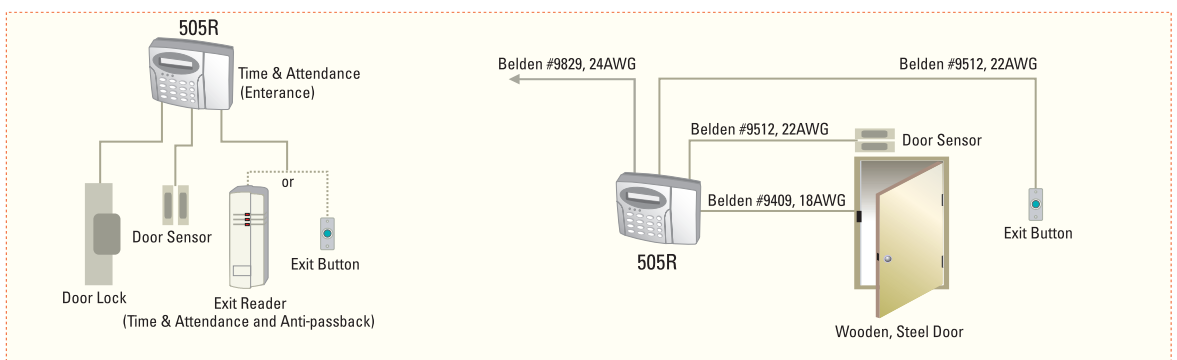



Time & Attendance Pack

Contents of 505TA Pack

- 505R - 1ea
- Power Adapter (AC110V~220V, Output DC12V, 1A)
- Cable - 1ea
- Card (IDC80) - 50ea
- Time & Attendance Application S/W - 1ea
- Software Manual - 1copy



Specifications

Model		505R
CPU		Dual 8bit Microprocessor
Memory	Program Memory	64KByte ROM
	Data Memory	128KByte SRAM (Battery back up)
User		500 ~ 10,000 Users
Event Buffer		2,500 ~ 7,250 Event Buffers
Read Range	Passive Type	IDK50 / IMC125: Up to 2 inch (5cm) IDC80 / IDC170: Up to 4 inch (10cm)
	Active Type	IDA150 / IDA200 compatible
Reading Time (Card)		30ms.
Power / Current		DC 12V / Max.350mA
External Reader Port		1ea (26bit Wiegand, 4/8bit Burst for PIN)
Communication		RS232 / RS422 / RS485 (Max.32ch) TCP/IP (External LAN Converter required)
Baud Rate		9,600bps (default) / 4,800bps, 19,200bps and 38,400bps (selectable)
Input Port		4ea (Exit Button, Door Sensor, Aux#1, Aux#2)
Output Port		2ea (2 FORM-C Relay Output (COM, NO, NC) / DC12V~18V, Rating Max.2A) 2ea (TTL Output / DC5V, Rating Max.20mA)
LCD		Character LCD (2 Lines x 16 Char) / 2.62" x 0.55"(65.6mm x 13.8mm) Screen
Keypad		16 Key Numeric Keypad with Back Lighting
LED Indicator		3 Array LED Indicators (Red, Green and Yellow) 2 Color LED Indicator (Red and Green)
Beeper		Piezo Buzzer
Operating Temperature	LCD	0° to +50° C (+32° to +122° F)
	Controller	0° to +70° C (+32° to +158° F)
	RF Reader	-35° to +65° C (-31° to +149° F)
Operating Humidity		10% to 90% relative humidity non-condensing
Color		Dark Pearl Gray
Material		Polycarbonate
Dimension (W x H x T)		5.9" x 4.72" x 1.55" (150mm x 120mm x 39.5mm)
Weight		397g (0.88lbs)
Certification		UL, FCC, CE, MIC

Network Configuration

